

(Unit: mm)

### Technical Specifications


Operating voltage	120~277Vac, 50/60Hz
Rated load	400W@220V-277VAC 200W@120VAC(inductive) 800W@220V-277VAC 400W@ 120VAC(resistive)
HF system	5.8GHz±75MHz, ISM wave band
Transmitting power	<0.5mW
Power consumption	≤0.5W(standby)
Detection zone	Max.(D x H): 10m x 6m
Detection sensitivity	10% / 50% / 75% / 100%
Hold time	5s / 30s / 90s / 3min / 20min / 30min
Daylight sensor	2lux / 10lux / 25lux / 50lux / Disable
Mounting height	6m Max.
Motion detection	0.5~3m/s
Detection angle	150°(wall installation) 360°(ceiling installation)
Operating temperature	-20℃~60℃
IP rating	IP20

### General Guidelines for Installation



- 1, The sensor should be installed by a qualified electrician. And ensure that the electricity supply is switched off before installing or servicing the product.
- 2, The sensor should not be modified in any way. Any modifications made to this product will immediately invalidate any warranties issued.
- 3, The company does not accept responsibility for any consequences resulting from unauthorized modification of the product.
- 4, The sensor should be connected to a stable power supply of 220/240Vac 50Hz.
- 5, Microwaves cannot pass through metal or brick walls if thicker than 20cm. They will pass through thinner walls but there will be some attenuation.
- 6, Installation inside a glass or plastic housing will result in a reduction of detection sensitivity. Expect a reduction of approximately 20% for every 3mm of thickness.

### Installation & Wiring



Pic 1

The sensor is designed for installation at 1~6m in height.

Suggested mounting height: 1~1.8m (Wall mounting), 2.5~6m (Ceiling mounting).


The sensor has 4-position terminal block as Pic 1:

L(Phase) N(Neutral) L' (Switched phase / control)

Shenzhen Merrytek Technology Co.,Ltd

No.3 Building, 380 Xiangshang Avenue, No.3 Industrial Park Luotian, Songgang Town, Bao'an District, Shenzhen 518105, Guangdong, China  
www.merrytek.com Email:sales@merrytek.com

## Wiring scheme

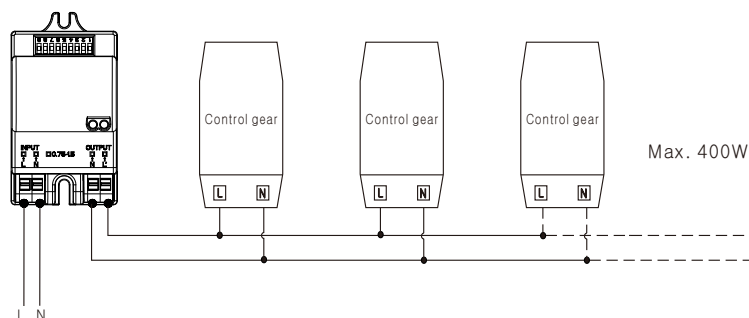

## Settings

Detection area, hold time and daylight sensor can be set using DIP switches on the sensor. Note that reducing the detection area will also reduce the sensitivity.

### 1, Detection area

- I: up to 5m
- II: up to 3.5m
- III: up to 2.5m
- IV: up to 0.5m

	1	2	
I	ON	ON	100%
II	—	ON	75%
III	ON	—	50%
IV	—	—	10%

### 2, Hold time

Refers to the time period the lamp remains at 100% illumination after no motion detected.

- I: 5s
- II: 30s
- III: 90s
- IV: 3min
- V: 20min
- VI: 30min

	3	4	5	
I	ON	ON	ON	5s
II	—	ON	ON	30s
III	ON	—	ON	90s
IV	—	—	ON	3min
V	ON	ON	—	20min
VI	—	—	—	30min

### 3, Daylight sensor

The sensor can be set to only allow the lamp to illuminate below a defined ambient brightness threshold. The settings are as follows:

- I: 2lux, darkness operation only
- II: 10lux, darkness operation only
- III: 25lux, twilight operation
- IV: 50lux, twilight operation
- V: Disable\*

\*When set to Disable mode, the daylight sensor will switch on the lamp when motion is detected regardless of ambient light levels.

	6	7	8	
I	ON	ON	ON	2lux
II	ON	ON	—	10lux
III	—	ON	—	25lux
IV	ON	—	—	50lux
V	—	—	—	Disable

When set to "Constant ON", the microwave sensor function is inactive, lights turns on or off by switch.

When set to Sensor, the microwave sensor function is active.

	9	
I	ON	Constant ON
II	—	Sensor

## FAQ

Question	Cause	Remedy
The load will not illuminate.	Incorrect daylight sensor setting selected.	Adjust setting.
	Load has failed.	Replace load.
	Power is switched off.	Switch on
The load is permanently illuminated.	Continuous movement in the detection area.	Check detection area setting.
	The lamp (containing sensor) is installed in an area too close to reflective surfaces, i. e. metal, glass or concrete walls.	1, Make sure installation area suitable with at least 30cm space between lamp and surrounding reflective surfaces. 2, Reduce sensitivity (detection area).
The load will not illuminate despite movement.	Speed of moving object is not in the range of 0.5~3m/s or the detection radius is too small.	Check detection area setting.

Shenzhen Merrytek Technology Co., Ltd

No.3 Building, 380 Xiangshang Avenue, No.3 Industrial Park Luotian, Songgang Town, Bao'an District, Shenzhen 518105, Guangdong, China  
www.merrytek.com Email:sales@merrytek.com