





# SPECIFICATION

Product Name: Microwave motion sensor

Model No.: MC601V

Issue Date: June 08, 2021

CUSTOMER APPROVED

| PRODUCT<br>DIRECTOR<br>APPROVED   | SALES<br>CHECKED  | R&D<br>CHECKED  | PREPARED  |
|---|---|---|---|
|  |  |  |  |

Shenzhen Merrytek Technology Co.,Ltd

Add: No.17th Building, Dianda Guyuan Industrial Park, Mashantou, Matian, Guangming District, Shenzhen, China, 518106

Tel: +86 (0)755-2305 7253

Fax: +86 (0)755-2786 3012

Website: [www.merrytek.com](http://www.merrytek.com)

## 1. Features



- Input voltage 120/277V AC, 50-60Hz
- 2-step or 3 step dimming with 1-10V dimmable led driver
- Designed with Syn interface,a group of sensors can be controlled synchronously
- 5 years warranty

## 2. Parameters

|                       |                              |   |
|-----------------------|------------------------------|---|
| Input                 | Operating voltage            | 108-305V AC 50Hz/60Hz   |
|                       | Rated voltage                | 120-277V AC 50Hz/60Hz   |
|                       | Stand-by power               | ≤1.0W   |
|                       | Surge test                   | N—L: 1kV  |
| Output                | Working mode                 | ON/OFF 1-10V dimming  |
|                       | Type of load                 | Inductive or resistive  |
|                       | Load capacity                | AC 120V 400W, AC220V-240V 800W, AC 277V 1000W   |
|                       | Max.surge capacity           | 50A (50% Ipeak, twidth =500uS, 277Vac full load, cold start); 80A (50% Ipeak, twidth =200uS, 277Vac, full load, cold start) |
| Dim interface         | 1-10V Dimming                | < 50mA (Non-constant source)  |
|                       | Syn control                  | 0/5V  |
| Sensor parameters     | Operating frequency          | 5.8 GHz ±75 MHz, ISM band   |
|                       | Transmitting power           | 0.5mW Max.  |
|                       | Hold time                    | 5s/30s/90s/3min/20min/+∞  |
|                       | Stand-by dim Level           | 10%/20%/30%/50%   |
|                       | Stand-by Period              | 0S/5S/5min/10min/30min/1h/+∞  |
|                       | Detection Area               | 25%/50%/75%/100%/   |
|                       | Daylight Sensor              | 2 lux/5Lux /10Lux 25Lux /50Lux /100Lux /Disable   |
|                       | Detection Pattern            | Refer to detection pattern  |
|                       | Mounting height              | Suggest:3-10m support 12m Max.  |
|                       | Detecting Angle              | 150°(wall mounting) 360°(ceiling mounting)  |
| Operating environment | Operating Temperature        | -30℃~60℃  |
|                       | Storage Temperature/humidity | -40℃~80℃  |
| Certificate Standards | Safety standards             | EN61058-1,EN61058-1-2,UL60730   |
|                       | EMC standards                | EN55015,EN61547,EN6100,EN301489,EN300440  |
|                       | Environmental Requirement    | Compliant to RoHS   |

Shenzhen Merrytek Technology Co.,Ltd

Add: No.17th Building, Dianda Guyuan Industrial Park, Mashantou, Matian, Guangming District, Shenzhen, China, 518106

Tel: +86 (0)755-2305 7253


Fax: +86 (0)755-2786 3012

Website: www.merrytek.com


|  |                       |   |
|--|-----------------------|---|
|  | Certificate           | CE, RED, cULus  |
| Others   | Wiring                | Press-in terminals    wire diamter: 0.75-1.5mm <sup>2</sup> |
|  | IP Rating             | IP20  |
|  | Protection Class      | Class II  |
|  | Installation          | Built-in  |
|  | Installation imension | 180*50*30mm   |
|  | Package               | Bubble bag+ Clapboard+ Carton(K=A)                          |
|  | Net weight            | 75g   |
|  | Life time             | 5 years warranty @Ta 230V full load                         |
| <p>Note 1. "N/A" means not available. 2. Detection area is effected on volume of motion object and motion speed. The detection area is tested by a 165cm height person and walking speed is 0.5m/s</p> |                       |   |

### 3.Function


#### 1. On-off function (Stand-by Period "0s")

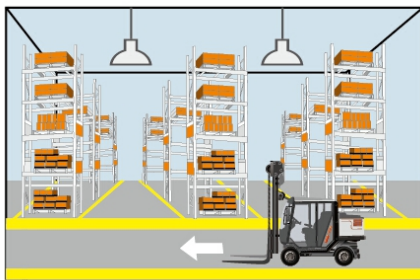

- ① With sufficient ambient light, the light will not be switched on even if with motion signal.

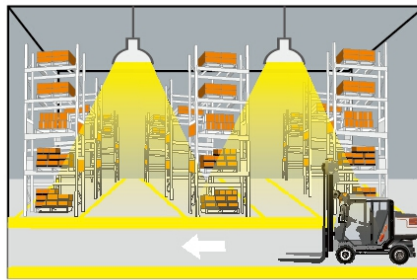


- ② With insufficient ambient light, the sensor switches on the light when motion is detected.

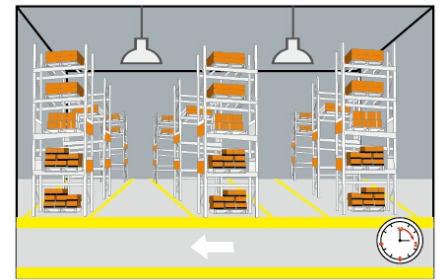


- ③ After elapse of hold time, the sensor switches off the light when no motion is detected.


#### 2. 2-step dimming function (Stand-by Period "+∞")

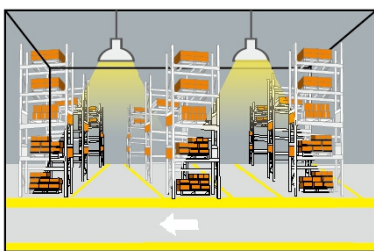

- ① If there is no motion detected, the light will be remained at a low light level all the time.

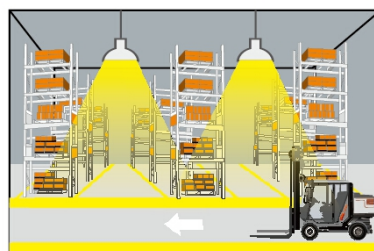

- ② When motion is detected, the sensor will switch on the light to 100% brightness

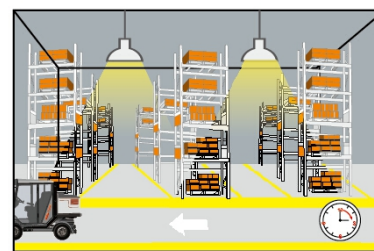

- ③ After elapse of hold time, the sensor dims the light at the present low light level if no motion is detected.

Shenzhen Merrytek Technology Co.,Ltd


Add: No.17th Building, Dianda Guyuan Industrial Park, Mashantou, Matian, Guangming District, Shenzhen, China, 518106

Tel: +86 (0)755-2305 7253


Fax: +86 (0)755-2786 3012

Website: www.merrytek.com


### 3. 3-step dimming function (Stand-by Period “5s/5min/10min/30min/1h”)




- ① With sufficient ambient light, the light will not be switched on even if with motion signal.



- ② With insufficient ambient light, the sensor switches on the light when motion is detected.




- ③ After elapse of hold time, the sensor dims the light at a low light level if no new motion is detected.




- ④ After elapse of standby period, the sensor switches off the light if no motion is detected in the detection zone.

### 4.Dimension (mm)

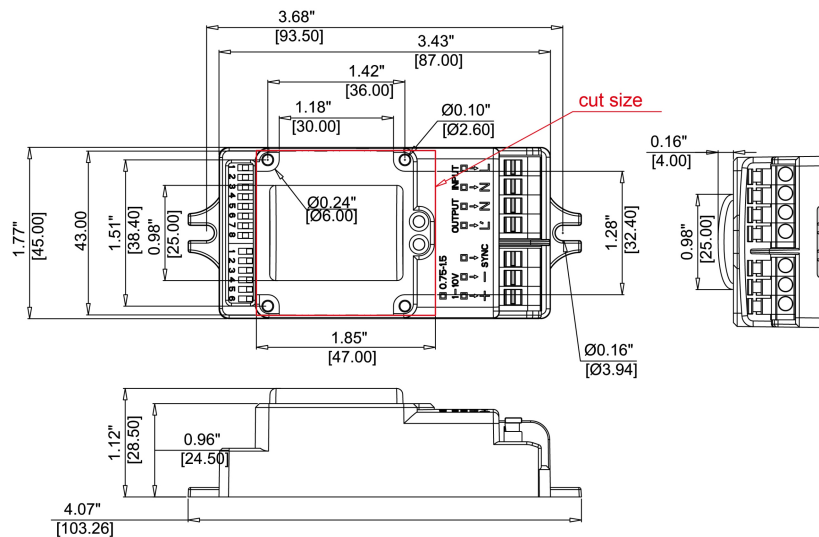

\*To avoid blocking microwave transmitting, please cut hole as image above to make sure microwave antenna exposed from any metal.

### 5. Wiring

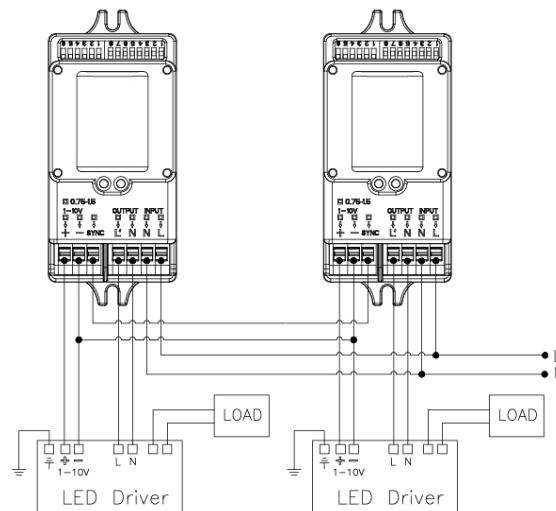

\*The sensor is designed for connect one load only. Connect more than one loads may damage the sensor.

Shenzhen Merrytek Technology Co.,Ltd


Add: No.17th Building, Dianda Guyuan Industrial Park, Mashantou, Matian, Guangming District, Shenzhen, China, 518106

Tel: +86 (0)755-2305 7253

Fax: +86 (0)755-2786 3012

Website: [www.merrytek.com](http://www.merrytek.com)


## 6. Structure

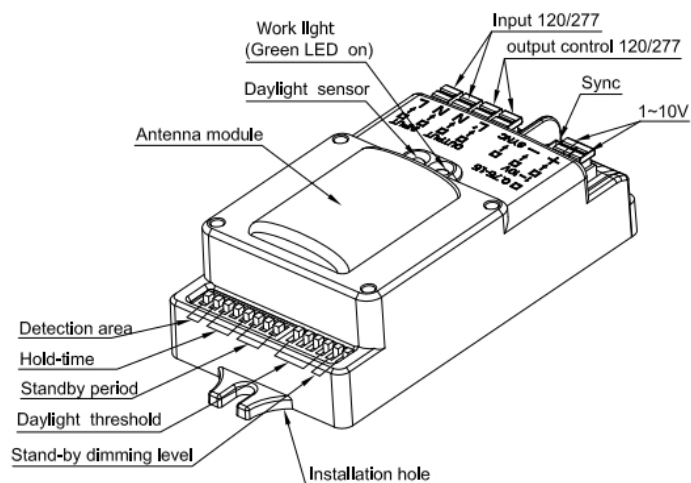

## 7. Detection pattern


### 1) Ceiling mounting

Height: 3m  
Sensitivity: 100%




Fast moving  
(Speed: 1m/s)

Height: 6m  
Sensitivity: 100%




Fast moving  
(Speed: 1m/s)

Height: 9m  
Sensitivity: 100%/75%




Fast moving  
(Speed: 1m/s)


Height: 12m  
Sensitivity: 100%




Fast moving  
(Speed: 1m/s)




Slow moving  
(Speed: 0.3m/s)



Slow moving  
(Speed: 0.3m/s)



Slow moving  
(Speed: 0.3m/s)



Slow moving  
(Speed: 0.3m/s)

Shenzhen Merrytek Technology Co.,Ltd

Add: No.17th Building, Dianda Guyuan Industrial Park, Mashantou, Matian, Guangming District, Shenzhen, China, 518106

Tel: +86 (0)755-2305 7253

Fax: +86 (0)755-2786 3012

Website: [www.merrytek.com](http://www.merrytek.com)

## 8. Dip switch settings

### Detection Area

|     | 1  | 2  |      |
|-----|----|----|------|
| I   | ON | ON | 100% |
| II  | ON | -  | 75%  |
| III | -  | ON | 50%  |
| IV  | -  | -  | 10%  |

### Hold Time

|     | 3  | 4  | 5  |       |
|-----|----|----|----|-------|
| I   | ON | ON | ON | 5S    |
| II  | -  | ON | ON | 30s   |
| III | ON | -  | ON | 90S   |
| IV  | -  | -  | ON | 3min  |
| V   | ON | ON | -  | 20min |
| VI  | -  | -  | -  | +∞    |

### Stand-by Period

|     | 6  | 7  | 8  |       |
|-----|----|----|----|-------|
| I   | ON | ON | ON | 0S    |
| II  | -  | ON | ON | 5S    |
| III | ON | -  | ON | 5min  |
| IV  | -  | -  | ON | 10min |
| V   | ON | ON | -  | 30min |
| VI  | -  | ON | -  | 1H    |
| VII | -  | -  | -  | +∞    |

Shenzhen Merrytek Technology Co.,Ltd

Add: No.17th Building, Dianda Guyuan Industrial Park, Mashantou, Matian, Guangming District, Shenzhen, China, 518106

Tel: +86 (0)755-2305 7253

Fax: +86 (0)755-2786 3012

Website: [www.merrytek.com](http://www.merrytek.com)

## Daylight Sensor

|     | 1  | 2  | 3  | 4  |         |
|-----|----|----|----|----|---------|
| I   | -  | -  | ON | ON | 2Lux    |
| II  | -  | -  | -  | ON | 5Lux    |
| III | -  | ON | ON | -  | 10Lux   |
| IV  | -  | -  | ON | -  | 25lux   |
| V   | -  | ON | -  | -  | 50lux   |
| VI  | ON | -  | -  | -  | 100lux  |
| VII | -  | -  | -  | -  | Disable |

## Stand-by DIM Level

|     | 5  | 6  |     |
|-----|----|----|-----|
| I   | ON | ON | 50% |
| II  | -  | ON | 30% |
| III | ON | -  | 20% |
| IV  | -  | -  | 10% |

## 9. Initialization

1/ On/Off function /3-step dimming function: After power on, the sensor automatically turns on light at 100% brightness. After 10sec, it turns off the light. During the initialization, the sensor is not able to detect movement. 2/ 2-step dimming function: After power on, the sensor automatically turns on light at 100% brightness. After 10sec, it dims the light to a low light level (set by stand-by dim level). During the initialization, the sensor is not able

## 10. Factory setting

Detection area: 100%, Hold time: 5s, Stand-by Period: 5s, Stand-by dim level: 10%, Daylight Sensor: Disable

Shenzhen Merrytek Technology Co.,Ltd

Add: No.17th Building, Dianda Guyuan Industrial Park, Mashantou, Matian, Guangming District, Shenzhen, China, 518106

Tel: +86 (0)755-2305 7253

Fax: +86 (0)755-2786 3012

Website: [www.merrytek.com](http://www.merrytek.com)



## 11. Application notice

1. The sensor should be installed by a qualified electrician. And ensure that the electricity supply is switched off before installing or servicing the product.
2. Installation inside a glass or plastic housing will result in a reduction of detection sensitivity. Expect a reduction of approximately 20% for every 3mm of thickness.
3. Detection area will be affected by speed of motion, height of installation and volume of moving object.
4. Daylight sensor was tested on sunny environment with no lampshad
5. Sensors settings may need to be adjusted to match installation site, please follow below instructions or contact manufacturer.
6. The sensor is designed for indoor use only. Outdoor use for a long time may reduce the waterproof effects. The raining or wind blowing may trigger the microwave sensor even if without human motion when outdoor use.
7. The distance between any two sensors should be at least 3m to avoid interference with each other.
8. When the microwave sensor is installed in a metal lighting fixture or space with large reflector, for example a warehouse with metal roof, the microwave will be reflected and cause the lights permanently illuminated even if without motion signal. Please reduce the detection area (sensitivity) to solve the problems, or contact the microwave sensor manufacturer to provide technical support.
9. Make sure the sensor not close to or be blocked by high density material, such as metal, glass, concrete walls etc. The materials will reduce or block microwave and cause false trigger.
10. Make sure there are no fans or other vibrating objects in installation area. The movements will trigger sensor as well.
11. You are advised to test 5 samples before mass application of sensor in a new lighting project.