


SENSOR DIM LED DRIVER USER'S MANUAL MODEL NO.: MLC10C-P, MLC16C-P, MLC21C-P, MLC28C-P





Feature

- Integration of LED driver and microwave motion sensor
- High PF >0.9
- Standby power less than 1W
- Output current can be selectable via DIP switch.
- ON-OFF and 3-step dimming function can be available.
- Detection area, time delay, daylight threshold can be set via DIP switch

Technical Specifications

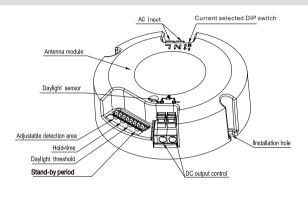






| Model NO. | MLC28C-P | MLC21C-P | MLC16C-P | MLC10C-P |
|----------------------------|---------------------------------------|----------------------------------|----------------------------------|----------------------------------|
| Operating voltage | 220~240Vac, 50/60Hz | 220~240Vac, 50/60Hz | 220~240Vac, 50/60Hz | 220~240Vac, 50/60Hz |
| Output constant current | 450/550/600/700mA, set via DIP switch | 300mA/ 350mA, set via DIP switch | 300mA/ 350mA, set via DIP switch | 300mA/ 350mA, set via DIP switch |
| Output voltage | 22-40Vdc | 34-60Vdc | 28-48Vdc | 14-28Vdc |
| Efficiency | ≥80% | ≥80% | ≥80% | ≥80% |
| Power factor | ≥0.9 | ≥0.9 | ≥0.9 | ≥0.9 |
| HF system | 5.8GHz±75MHz, ISM wave band | 5.8GHz±75MHz, ISM wave band | 5.8GHz±75MHz, ISM wave band | 5.8GHz±75MHz, ISM wave band |
| Transmitting power | <0.5mW | <0.5mW | <0.5mW | <0.5mW |
| Power consumption | ≤1W(standby) | ≤1W(standby) | ≤1W(standby) | ≤1W(standby) |
| Detection zone Max.(D x H) | 16m x 6m | 16m x 6m | 16m x 6m | 16m x 6m |
| Detection sensitivity | 10% / 50% / 75% / 100% | 10% / 50% / 75% / 100% | 10% / 50% / 75% / 100% | 10% / 50% / 75% / 100% |
| Hold time | 5s / 90s / 3min / 10min | 5s / 90s / 3min / 10min | 5s / 90s / 3min / 10min | 5s / 90s / 3min / 10min |
| Corridor function | 0s / 30s / 10min / Disable | 0s / 30s / 10min / Disable | 0s / 30s / 10min / Disable | 0s / 30s / 10min / Disable |
| Daylight sensor | 5lux / 15lux / 50Llux / Disable | 5lux / 15lux / 50Llux / Disable | 5lux / 15lux / 50Llux / Disable | 5lux / 15lux / 50Llux / Disable |
| Stand-by dimming level | 10%, can be customized | 10%, can be customized | 10%, can be customized | 10%, can be customized |
| Mounting height | 6m Max. | 6m Max. | 6m Max. | 6m Max. |
| Motion detection | 0.5~3m/s | 0.5~3m/s | 0.5~3m/s | 0.5~3m/s |
| Detection angle | 150° (Wall installation) | 150° (Wall installation) | 150° (Wall installation) | 150° (Wall installation) |
| | 360° (Ceiling installation) | 360° (Ceiling installation) | 360° (Ceiling installation) | 360° (Ceiling installation) |
| Working temperature(Ta) | -20°c ~45°c | -20°c ~45°c | -20°c ~45°c | -20°c ~45°c |
| Size (ΦxH) | 82x28.5mm | 78x28.5mm | 78x28.5mm | 68x28.5mm |
| IP rating | IP20 | IP20 | IP20 | IP20 |


General Guidelines for Installation



- 1, Please ensure that the electricity supply is switched off before installing or servicing the product.
- 2, The product should not be modified in any way. Any modifications mode to this product will immediately invalidate any warranties issued.
- 3, The company does not accept responsibility for any consequences resulting from unauthorized modification of the product.
- 4, Microwaves cannot pass through metal or brick walls if thicker than 20cm. They will pass through thinner walls but there will be some attenuation.

Ouput Current Selection

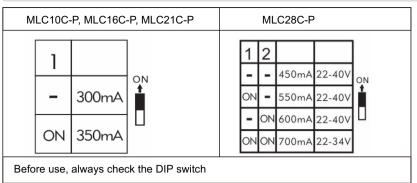

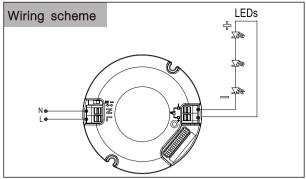


Sensor Data Setting

By selecting the combination on the DIP switch, sensor data can be precisely set for each specific application.

| | | 1 | 2 | |
|----|-------|----|----|------|
| ON | Ι | ON | ON | 100% |
| | Π | - | ON | 75% |
| | III | ON | - | 50% |
| | IV | _ | - | 10% |


Detection area

Detection area can be reduced by selecting the combination on the DIP switches to fit precisely each application.



Hold time


Refers to the time period the lamp remains at 100% illumination after no motion detected.



Daylight sensor

The sensor can be set to only allow the lamp to illuminate below a defined ambient brightness threshold.

When set to Disable mode, the daylight sensor will switch on the lamp when motion is detected regardless of ambient light level. 50lux: twilight operation, 15lux, 5lux: darkness operation only.



Corridor function (Stand-by period)

Refers to the time period the lamp remains at a low light level before it completely switches off in the long absence of people.

When set to " $+\infty$ ", the low light is maintained until motion is detected. When set to "0s", the light will turn off after hold time.

FAQ

| Question | Cause | Remedy | |
|--|--|--|--|
| | Incorrect daylight sensor setting selected. | Adjust setting. | |
| The load will not illuminate. | Load has failed. | Replace load. | |
| | Power is switched off. | Switch on | |
| | Continuous movement in the detection area. | Check detection area setting. | |
| The load is permanently illuminated. | The lamp (containing sensor) is installed in an area too close to reflective surfaces, i. e. metal, glass or concrete walls. | 1, Make sure installation area suitable with at least 30cm space between lamp and surrounding reflective surfaces. 2, Reduce sensitivity (detection area). | |
| The load will not illuminate despite movement. | Speed of moving object is not in the range of 0. 5~3m/s or the detection radius is too small. | Check detection area setting. | |