


SPECIFICATION

Product Name: High Bay Sensor for Warehouse

Model No.: MC079D RC 2(daylight priority)

Issue Date: July 03, 2024

CUSTOMER APPROVED

PRODUCT DIRECTOR APPROVED	P&M CHECKED	R&D CHECKED	PREPARED
			

*Please read the 11th instruction carefully before using this product, since the performance of DC-powered microwave products is closely related to the stability and characteristics of the auxiliary power supply of the LED driver.

1. Features



MC079D RC2 A



MC079D RC2 B

- 12Vdc±1V input, for DC systems or LED power supplies with 12Vdc±1V auxiliary power output
- 0-10V dimming port, 3 or 2 step dimming function
- Newly patent design sensor antenna with two detection mode: high sensitivity detection and interference immunity detection. (suitable for installation environments with many metal reflective surfaces)
- Compact design, special for industrial lamps, sensors can be fixed at the edge or center of UFO.
- 15m maximum installation height, suitable for most warehouses
- Patented remote control, transmitting angle of the remote control is adjustable according to mounting height
- Dim+/Dim- to set occupancy light level
- Daylight priority function
- 5 years warranty

2. Parameter

Input	DC Input Voltage	12Vdc±1V
	Rated Voltage	12Vdc±1V
	Voltage Ripple	<300mVp-p
	Stand-by Power	<0.3W
	Wiring	MC079D RC2 A fast connector MC079D RC2 B 3 cores cable, wire diameter: 22AWG
Output	Working Mode	0-10V DC
	Wiring	MC079D RC2 A fast connector MC079D RC2 B 3 cores cable, wire diameter: 22AWG
Dim Interface	0-10V Dimming	< 50mA (Non-constant source)
Sensor Parameters	Operating Frequency	5.8 GHz ±75 MHz, ISM Band.
	Transmitting power	1mW Max.
	Hold time	5S/30S/1min/3min/5min/10min/20min/30min
	Stand-by DIM Level	10%(1.4-1.6V), 20%(1.9-2.1V), 30%(2.9-3.1V), 50% (4.9-5.1V)
	Stand-by Period	0s/10S/1min/3min/5min/10min/30min/+∞
	Detection Area	25%/50%/75%/100%
	Daylight Sensor	5lux/15Lux/30Lux/50Lux/100lux/150lux/Disable Daylight priority(5lux/15Lux/30Lux/50Lux)/150Lux 100Lux/200Lux 150Lux/300Lux
	Detecting Radius	See detection pattern

	Mounting Height	15m Max
	Detecting Angle	150°(wall mounting) 360°(ceiling mounting)
Operating Environment	Operating Temperature	-35℃...+70℃
	Storage Temperature	Temperature: -40℃...+80℃; Humidity: 10%-95% (non-condensing)
Certificate Standards	Safety standards	EN60669-2-1, EN60669-1
	EMC standards	EN55015, EN61000-3-2, EN61000-3-3, EN61547
	Environmental Requirement	Compliant to RoHS
	Certificate	CE
Others	Wiring	UL21996,3*22AWG, cable length: 300mm(pending)
	IP Rating	IP65 (MC079D RC2 A), IP20 (MC079D RC2 B)
	Protection Class	Class II
	Installation	External mounting,integrated mounting
	Dimension	See dimension
	Package	White paper box
	Net Weight	55g
	Lifetime	5 years warranty @Ta 230V full load

Note


1. "N/A" means not available.

2. The detection range of the sensor is related to the moving speed and size of moving object, mounting height, installation height and angle, installation site, reflectors around the sensor etc. The data in the document is typical value and tested by a 165cm person in an open indoor area.


The detection range at wall mounting will be longer at ceiling mounting. Please reduce detection sensitivity at wall mounting or contact us to confirm the sensor data settings.

3. Function


1) On/OFF Function (stand-by period be set to "0"s)

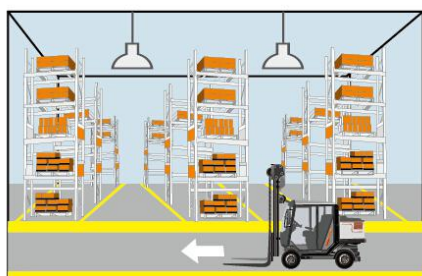

① With sufficient ambient light, the light will not be switched on even if with motion signal.

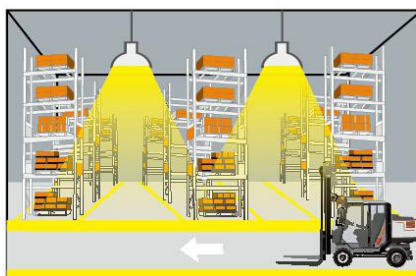

② With insufficient ambient light, the sensor switches on the light when motion is detected.

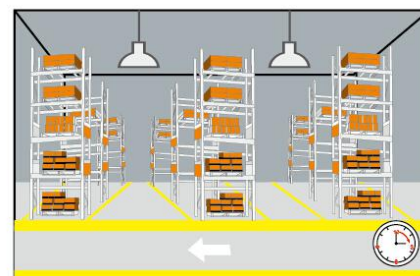

③ After elapse of hold time, the sensor switches off the light when no motion is detected.

Shenzhen Merrytek Technology Co.,Ltd


Add: No.17th Building, Dianda Guyuan Industrial Park, Mashantou, Matian, Guangming District, Shenzhen, China, 518106

Tel: +86 (0)755-2305 7253


Fax: +86 (0)755-2786 3012

Website: www.merrytek.com


2) 2-step dimming function (stand-by period be set to “+∞”)

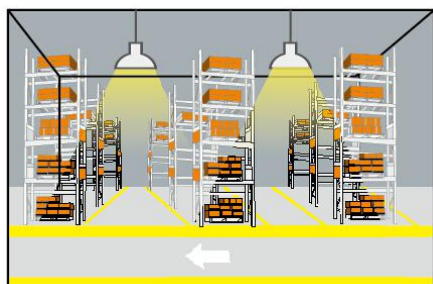

① If there is no motion detected, the light will be remained at a low light level all the time.

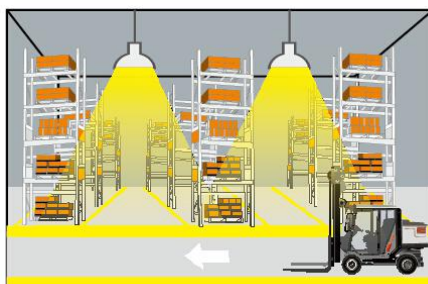


② When motion is detected, the sensor will switch on the light to 100% brightness

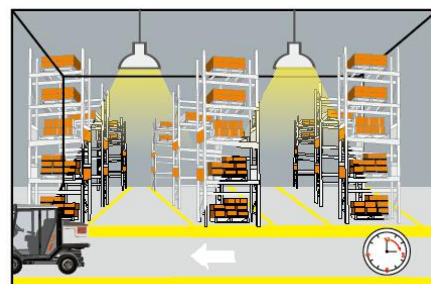


③ After elapse of hold time, the sensor dims the light at the present low light level if no motion is detected.


3) 3-step dimming function (stand-by period be set to “10S/1min/3min/5min/10min/30min”)

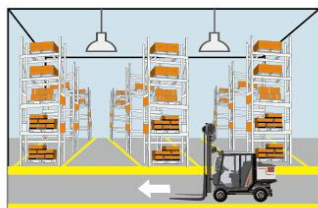


① With sufficient ambient light, the light will not be switched on even if with motion signal.

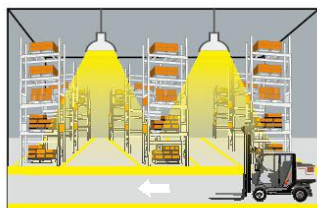

② With insufficient ambient light, the sensor switches on the light when motion is detected.

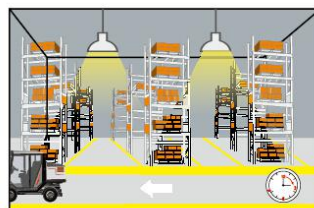


③ After elapse of hold time, the sensor dims the light at a low light level if no new motion is detected.

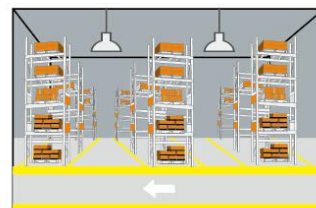


④ After elapse of standby period, the sensor switches off the light if no motion is detected in the detection zone.


4) Daylight priority (stand-by period set to +∞)

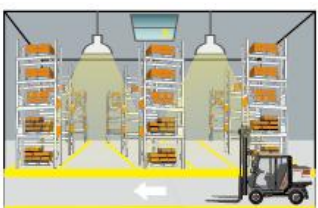


① Lamp turns on at low light level 10% in the night.

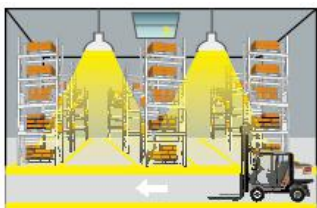

② Motion detected, lamp automatically lights up to 100%.

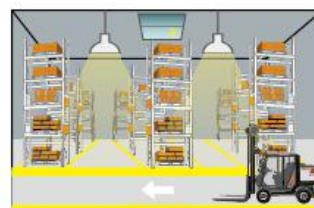


③ After hold time, the lamp gradually dims to a low light level 10% if no movement detected.

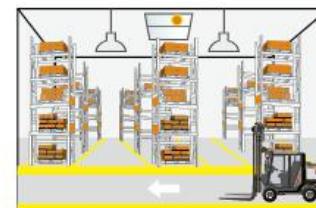


④ Lamp turns off after dawn.

4. Dimension (mm)

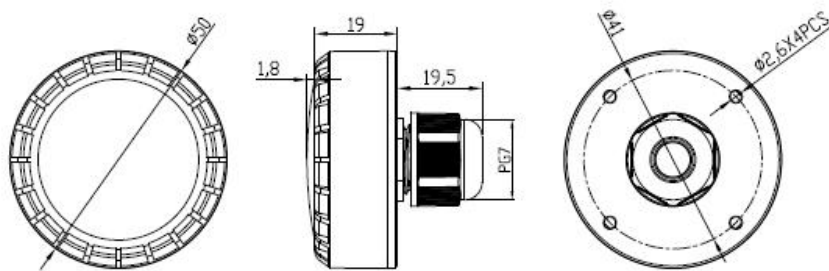


MC079D RC2 A

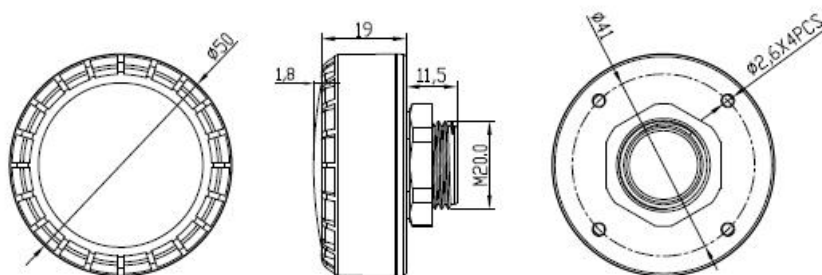


MC079D RC2 B

5. Wiring

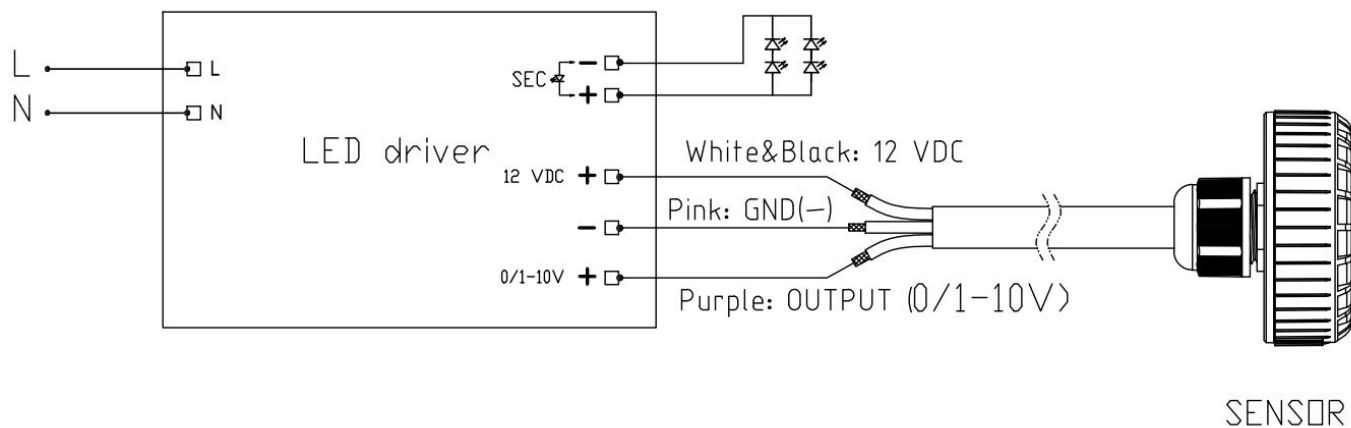

*The sensor is designed to connect one load only. Connect more than one loads may damage the sensor.


6. Structure

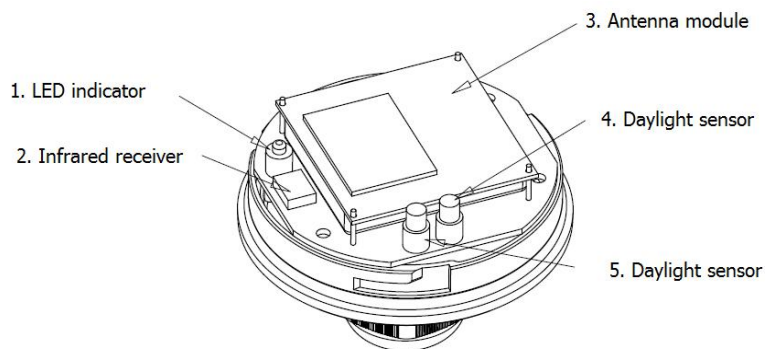

7. Radiation Pattern


Ceiling mounting

Ceiling mounted height: 3m
Sensitivity: 100%/75%/50%/25%

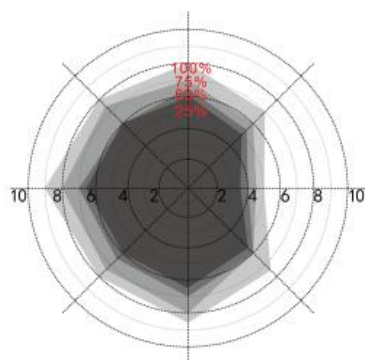


Normal moving (Speed: 1m/s)


Ceiling mounted height: 12m
Sensitivity: 100%/75%/50%/25%

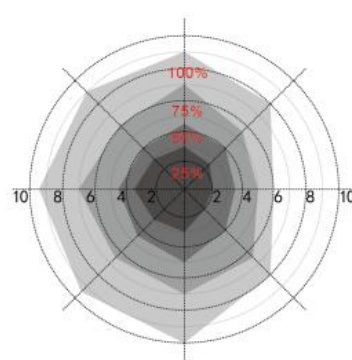

Normal moving (Speed: 1m/s)

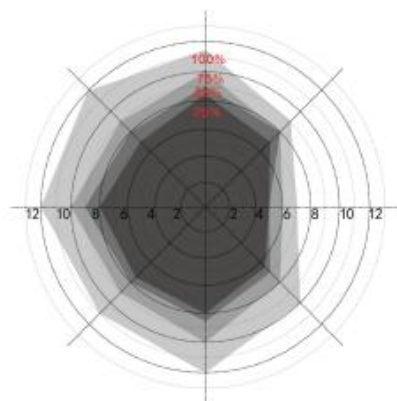


Slow moving (Speed: 0.3m/s)

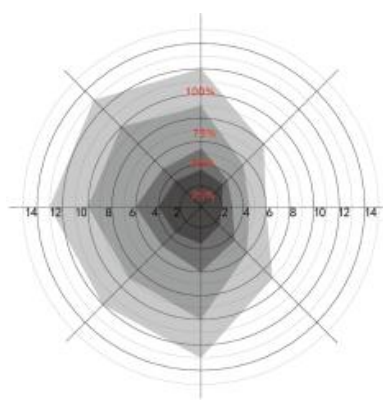


Slow moving (Speed: 0.3m/s)

Wall mounting

Horizon mounted height: 2m
Sensitivity: 100%/75%/50%/25%

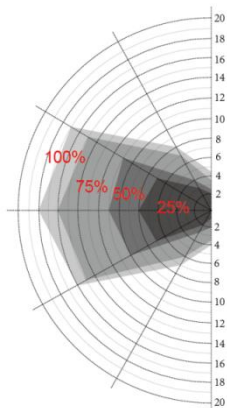

Normal moving (Speed: 1m/s)

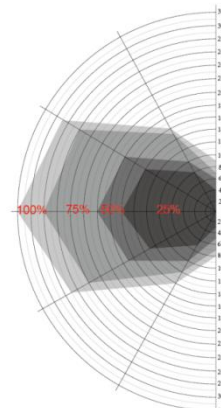

Slow moving (Speed: 0.3m/s)

8. Remote Control

Remote Control Setting	Button	Remarks																												
		Press the "ON/OFF" button, the light goes to constant on/off mode, sensor is disabled. Press "Reset" "Auto mode" button to quit from this mode and the sensor starts to work. No memory for ON-OFF setting after power off. Sensor mode will auto recover after restart power supply.																												
	Reset	Press "Reset" button, all parameters are same as setting of DIP switch or factory settings.																												
	Sensor motion	Press "Sensor motion" button, the light quits from the constant on/ off mode, and the sensor starts to work (The latest setting stays in validity)																												
	DIM Test	Press "DIM Test" button, the 1-10 V dimming works to test whether the 1-10Vdc dimming ports are connected properly. After 2s, it returns to the latest setting automatically.																												
	Override DH	Long press 3s, Daylight priority mode will be switched to daylight threshold mode, lux value will go back to previous one.																												
	DIM+ DIM-	Short press "Dim+/Dim-" button to Set the output lumen level, each press will $\pm 2\%$ light level.																												
	DH Mode	Long press >3s, sensor will be switched to daylight priority mode, if preset daylight value is Disable, press DH Mode can not start daylight priority mode.																												
	Q1 Q2 Q3	<table border="1"> <thead> <tr> <th>Scene Options</th> <th>Detection Area</th> <th>Hold Time</th> <th>Stand-by period</th> <th>Stand-by dim level</th> <th>Daylight Sensor</th> <th>Induction model</th> </tr> </thead> <tbody> <tr> <td>Q51</td> <td>100%</td> <td>5min</td> <td>10min</td> <td>10%</td> <td>30Lux</td> <td>HS</td> </tr> <tr> <td>Q52</td> <td>100%</td> <td>10min</td> <td>30min</td> <td>10%</td> <td>Disable</td> <td>HS</td> </tr> <tr> <td>Q53</td> <td>100%</td> <td>20min</td> <td>30min</td> <td>10%</td> <td>Disable</td> <td>HS</td> </tr> </tbody> </table>	Scene Options	Detection Area	Hold Time	Stand-by period	Stand-by dim level	Daylight Sensor	Induction model	Q51	100%	5min	10min	10%	30Lux	HS	Q52	100%	10min	30min	10%	Disable	HS	Q53	100%	20min	30min	10%	Disable	HS
	Scene Options	Detection Area	Hold Time	Stand-by period	Stand-by dim level	Daylight Sensor	Induction model																							
	Q51	100%	5min	10min	10%	30Lux	HS																							
	Q52	100%	10min	30min	10%	Disable	HS																							
	Q53	100%	20min	30min	10%	Disable	HS																							
	TEST 2S	Press the "TEST 2S" button can enter the test mode any time. At the mode, the sensor parameters as below: Detection Area is 100%, Hold Time is 5s, Stand-by Dim Level is 10%, Stand-by Period is 0s, daylight sensor disable. This function only for testing. Quit the mode by pressing "RESET" or any other function buttons.																												
	HS LS	Press "HS" button to set the detection area to be high sensitive. Press "LS" button to set the detection area to be low sensitive. The adjustment bases on the "Detection Area" parameter you set.																												
		Daylight Sensor Set up daylight threshold: 5Lux/15Lux/30Lux/50Lux/100Lux/150Lux/ Disable																												
	Stand-by period Set up stand-by time: 0S/10S/1min/3min/5min/10min/30min/+ ∞																													
	Hold time Set up hold time: 5S/30S/1min/3min/5min/10min/20min/30min																													
	Stand-by dim level Set up stand-by dim level: 10%/20%/30%/50%																													
	Detection Area Set up detection area: 25%/50%/75%/100%																													
	Remote Distance Toggle button can set the remote distance of remote control and sensor.																													

9. Initialization

1) On/Off function /3-step dimming function:

After power on, the sensor automatically turns on light at 100% brightness. After 10sec, it turns off the light. During the initialization, the sensor is not able to detect movement.

2) 2-step dimming function:

After power on, the sensor automatically turns on light at 100% brightness. After 10sec, it dims the light to a low

light level (set by stand-by dim level). During the initialization, the sensor is not able to detect movement.

10. Factory Setting

Detection area: 100%, Hold Time: 5S, Stand-by Period: 0s, Stand-by dim level: 10%, Daylight Sensor: Disable

11. Instruction

- 1) The sensor should be installed by a professional electrician. Please turn off the power before installing, wiring, changing the setting of the DIP switch.
- 2) The sensor which installed in the plastic and glass lampshade will reduce the sensitivity. For every 3mm increase in thickness, the sensitivity will be reduced by 20%.
- 3) The dimming performance could be different from different 0-10v drivers.
- 4) The detection range of the sensor is related to the moving speed and size of moving object, mounting height, installation height and angle, installation site, reflectors around the sensor etc. The data in the document is typical value and tested by a 165cm person in an open indoor area.
The detection range at wall mounting will be longer at ceiling mounting. Please reduce detection sensitivity at wall mounting or contact us to confirm the sensor data settings.
- 5) The light sensitivity threshold is in a sunny environment, no shadow and ambient light diffuse reflection. Ambient lux level could be different in different environment, weather, climate, time-of-day and season.
- 6) The parameters of the sensor may need to be reconfigured in different installation environments. Please refer to the following instructions or contact the manufacturer.
- 7) This sensor is for indoor use only. It will affect the waterproof effect for outdoor use. Wind, rain, and moving objects around will cause false triggering.
- 8) The distance between any inductive sensors should be greater than 3m.
- 9) Do not place the sensor close to high-density objects such as metal, glass, concrete walls, etc., false triggering could happen. When the sensor is installed in a metal lamp, metal reflective surface, or a narrow enclosed environment, the microwave will be reflected repeatedly and cause false triggering. Please reduce the sensitivity or contact the manufacturer for technical support.
- 10) Please ensure that there are no moving signals around the sensor, such as fan, DC motor, sewer pipe, air outlet, etc., the sensor may generate false trigger.
- 11) You are advised to test 5 samples before mass application of sensor in a new lighting project.
- 12) Due to continuous improvement, the contents of this instruction could be changed without prior notice
- 13) A stabilized DC power supply with stable output voltage and low ripple must be used, the power supply ripple should be less than 300mV, and the load current should be greater than 25mA.