

Specification

Product series: Low-mounting PIR motion sensor (ON/OFF version)

Product model: MSA069S IR

Product version: V1.0

Version	Release Date	Record	Publishing
V1.0	2026.3.12	Initial version	Jacky

【Product description】

MSA069S IR is a low-mounting PIR motion sensor with daylight detection function. It applies merrytek exclusive wide lens to achieve 30m diameter detection coverage when installed 2.5-6m. Combined with the unique software algorithm of Merrytek, it can accurately detect human movements in almost all scenario to trigger smart scene application.

【Product Feature】

- PIR motion detection
- Accurate motion detection with one channel ON/OFF output
- Daylight sensor detection available
- Daylight threshold gear learning available
- Detection area,hold time,daylight threshold etc can be set by rotation switch or remote control
- Max detection range: 30-36m in diameter
- 26A relay applied,max loading capacity :2000w resistive loading and 1200w inductive loading
- PUSH button control available
- Semi-auto/auto sensing mode available
- IQ mode available
- Sync control available
- Max 2kV surge capacity
- Open office,passageway etc motion detection highly recommended
- Flush mounting and surface mounting available



【Dimension】


- Product size: $\phi 90 \times 73.7 \text{mm}$
- Connection interface: 7-pin terminal

【Parameter】


Input/Output	Input voltage	220-240V AC
	Rated voltage	230V AC
	Working current	20mA max
	Power consumption	≤0.5W @230V AC
	Output signal	ON/OFF
	Max surge voltage	2KV(L/N,EN61000-4-5)
	Max surge current	75A (50% Ipeak, twidth =500us, 230Vac full load, cold start)
	Max loading	Max 2000w resistive loading and 1200w inductive loading @230Vac
Sensor parameter	Function	PIR motion detection+ daylight sensor
	Detection Area	Rotation switch/MH18 remote/MH10 remote setting: 100%/75%/50%/25%
	Hold Time	Rotation switch/MH18 remote/MH10 remote setting: Test 2s/30s/1min/5min/10min/30min
	Daylight Sensor	Rotation switch/MH18 remote/MH10 remote setting: 5Lux/15Lux/30Lux/50Lux/100Lux/150Lux/Disable
	Daylight threshold learning mode	When sensor enter daylight threshold learning mode,it'll learn current environment's daylight level and set it as threshold
		30lux turn on light, 200lux turn off light 50lux turn on light,300lux turn off light 100lux turn on light,400lux turn off light 150lux turn on light,500lux turn off light
	IQ mode	When sensor enter IQ mode.our sensor will auto set hold time based on sensor trigger frequency,hold time setting range is 10s-10min. 1. when current hold time is 10s and sensor triggered more than 3 times,hold time will auto set as 20s; 2. when current hold time is 20s and sensor triggered more than 6 times,hold time will auto set as 30s; 3. when current hold time is 30s and sensor triggered more than 10 times,hold time will auto set as 1min; 4. when current hold time is 1min and sensor triggered more than 20 times,hold time will auto set as 3min; 5. when current hold time is 3min and sensor triggered more than 40 times,hold time will auto set as 5min; 6. when current hold time is 5min and sensor triggered more than 80 times,hold time will auto set as 10min; when current hold time is 10min and sensor enter absence or sensor be re-powered,hold time will return to initial hold time
	Pulse mode	When sensor enter pulse mode.our sensor will keep on 2s and block sensing 8s when motion detected
	PUSH button control	Available 1. When auto mode is set:

		A. in such case,sensor can turn on light when motion detected and turn off light when no motion detected and hold time run out. B. If customer use push button turn on light,sensor will automatically turn off light when no motion detected and hold time run out. 2. When semi-auto mode is set: in such case,light can only be turned on by push button and be turned off by sensor when no motion detected and hold time run out.
	Sync control	When muti sensor is connected by SYNC terminal,they can be group controlled.when either sensor be triggered,all light will turn on light,and all light will turned off only when all sensor is not triggered
	Radius detection range based on 100% detection range	15-18m @25℃ based on 3m mounting height and tangential motion(radial motion trigger distance will be shorter than tangential)
	Remote control	available (MH18 remote/MH10 remote)
	Mounting heights	2.5-6m typical value: 3m
Application environment	Drill hole	Φ55mm
	Working temperature	-25℃...+50℃(detection range might differ based on different temperature)
	Storage temperature	-25℃~+50℃, humidity ≤60%(non-condensation status)
	Wiring standard	Wire diameter: 0.2-2.5mm ² Wire stripping length: 5-8mm
	Warranty	5 year (available based on product quality under indoor application)
Certificate Standard	Certificate	Compliant to CE
	Environmental requirements	Compliant to RoHS
	IP rating	IP20
"N/A" means not available		

【Dimension and Function diagram】

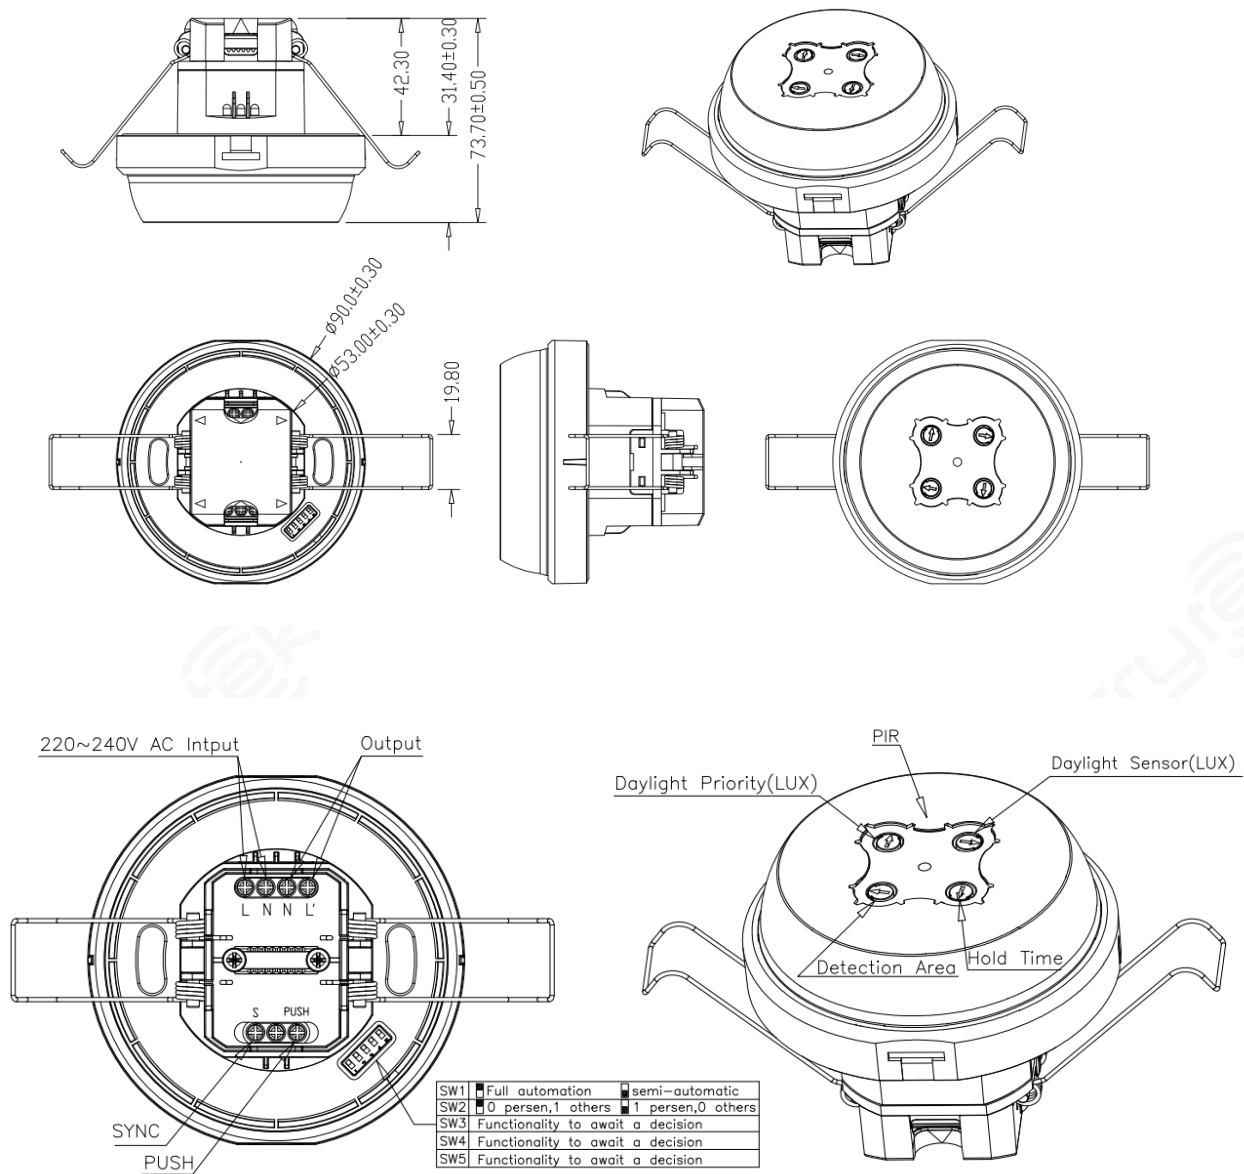

【Wiring instruction】

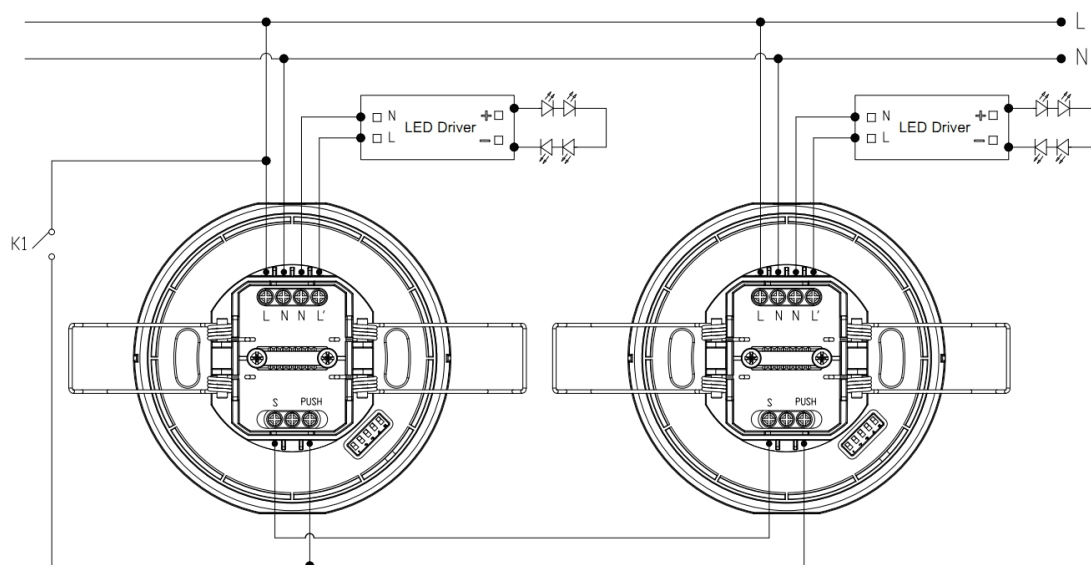

Wiring layout suggestion:

1. LN terminal stands for AC input, L'N stands for AC output, please wiring correctly
2. One sensor's max loading capacity is 2000w resistive loading and 1200w inductive loading for one single load. if you want connect more load in one loop, we recommend to add an AC contactor in our output LN terminal to avoid momentary surge overload.
3. S terminal shall NEVER connect to N terminal, or sensor will be burned.

【Initialization】

When powered on, sensor indicator will turn off after flashing for 35s and will not detect moving signal during this time. After 35S, you can use our rotation switch or remote to adjust detection area, hold time and daylight sensor etc parameter.


【Factory setting】

Detection Area: 100%, ON/OFF terminal Hold Time: 2s, dry contact terminal Hold Time: 2s, Daylight threshold: Disabled, Indicator: ON PUSH auto mode


【Detection radiation】

MSA069S IR is highly recommended ceiling flush mounting and its detection radiation is as below shows:

Top View

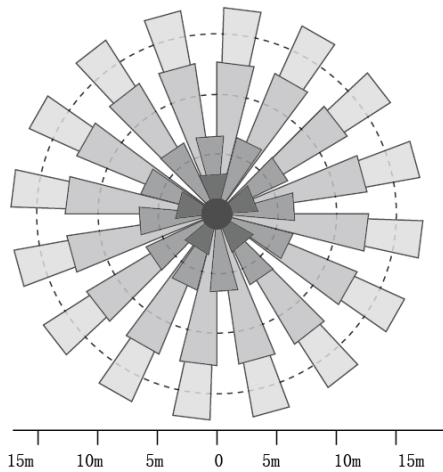

Side View

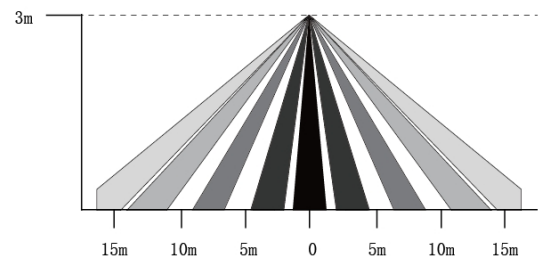

【Detection Signal】

The product detects human moving signals and below is a description of the moving signals:

- **Major motion signal:** detect the human significant moving (walking) in the detection area.



Major motion



Minor motion



Micro motion

【Rotation switch setting】


Detection Area

Gear	Detection area
1	25%
2	50%
3	75%
4	100%




Hold Time

Gear	Hold time
1	Test 2s
2	30s
3	1min
4	5min
5	10min
6	30min
7	Pulse mode
8	IQ mode



Daylight Sensor

Gear	Daylight threshold
1	5lux
2	15lux
3	30lux
4	50lux
5	100lux
6	150lux



7	Disable
---	---------

*When disabled set, our sensor will turn on light once motion detected regardless of environment daylight


Daylight Priority

Gear	Daylight priority gear
1	30lux ON/200lux OFF
2	50lux ON/300lux OFF
3	100lux ON/400lux OFF
4	150lux ON/500lux OFF
5	Disable



【Remote control setting】

MH10 remote:

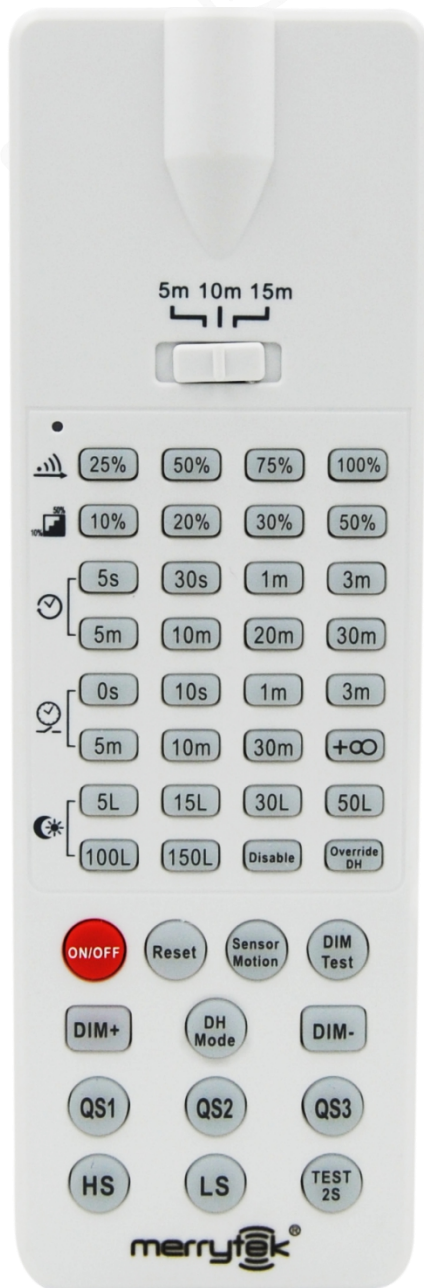

Detection area:

25%/50%/75%/100%

Daylight priority:

10%: 30lux turn on light/200lux turn off light,

20%: 50lux turn on light/300lux turn off light,

30%: 100lux turn on light/400lux turn off light

50%: 150lux turn on light/500lux turn off light

Hold time:

Test 2s (5S button) /30s/1min/3min/5min/10min/20min/30min

Daylight sensor threshold:

5lux/15lux/30lux/50lux/100lux/150lux/Disable

ON/OFF: disable sense function, light will be constantly on

Sensor motion: enable sense function


Reset: all parameter back as factory setting

DIM test: short press to turn on IQ mode

DIM+: short press to set on/off channel hold time

DIM-: short press to set dry contact channel hold time

MH18 remote:

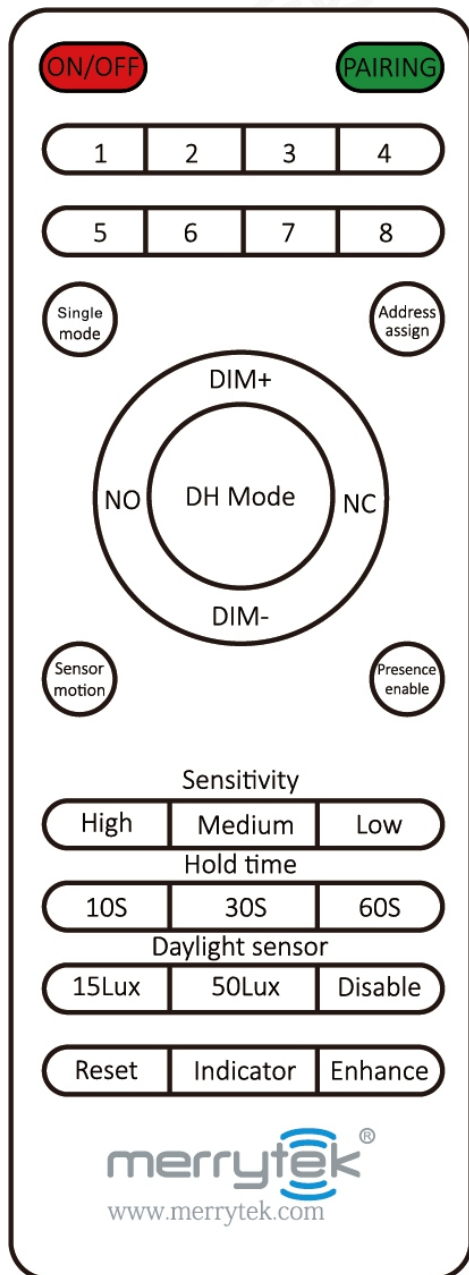

ON/OFF: disable sense function, light will be constantly on

PAIRING: short press to turn on IQ mode

Detection area: 1=100%, 2=75%, 3=50%, 4=25%,

Single mode: Long press 3s to enter pulse mode

DIM+: short press to set ON/OFF channel hold time, DIM-: short press to set Dry contact channel hold time

Sensor motion: short press to enable sense function (parameter will remain as last time status)

High: short press to set auto mode Low: short press to set semi-auto mode

Hold time: short press to set Test 2s (10s button) / 30s / 60s

Daylight sensor: short press to set 15lux / 50lux / Disable

Reset: short press to recover factory setting

Indicator: short press to turn on indicator, long press to turn off indicator

Enhance: short press to enter daylight sensor threshold learning

【Application tips】

1. Our sensor shall be installed by professional electrician under power-off state
2. Our sensor's typical installation is 3m high for indoor use only. And it's strongly suggested installed far away from hot or temperature-change-fast area to avoid false trigger
3. To ensure normal detection, there shall be no big object within our sensor's detection area because our sensor can't detect by penetrating object
4. There shall also no strong-reflect object, wifi router, microwave oven etc before our sensor to avoid false trigger
5. Our sensor's detection area function is based on 25°C environment temperature, when environment temperature is higher/lower than this temperature, our sensor will be dull/sensitive, such the detection area will be shorter/longer
6. Our sensor's detection area function is based on tangential movement, and become short if you test by radial movement due to PIR character

【Disclaimer】

Due to the complexity of product technology and differences in application environment, it is difficult to guarantee a completely accurate or complete description, so this specification is only for user reference. We will reserve the right to make changes to the product specifications without notifying the user, and do not make any commitments and guarantees in the legal sense. At the same time, our company encourages users to supplement or modify the contents of our specifications after using our products.