

KREAT
POWER

[illegible]

EN



Instruction
MI200927A0

- Built-in DALI-2 protocol, no flicker in full dimming range;
- Secondary 0-10V (he darkest below 1V does not turn off);
- Primary Push dimming function; Push dimming has state memory function;
- Short circuit / over temperature / over voltage protection; reduce output current after over temperature;
- Standby power consumption $\leq 0.5W$;
- Life span > 50,000 hours.

1. Start with setting the output current. The current can be easily configured by choosing the correct combination of the DIP switches(see fig F)
2. Connect the luminaires to the driver according to the wiring diagram.(see Fig A,B,or C)

- On/off: short push (100ms~1sec) on the switch
- Stepless dimming: long push(1sec~8secs) on the switch

- The driver supports any active 0-10V dimmer. Dimming curve, see Fig D.
- As DALI and push dimming is always active, If use the DALI dimming and push dimming first, users have to short 0-10V interface and power on driver 15 seconds at least to make 0-10V active before using 0-10V dimming.

- The driver built-in DALI interface . DALI Dimming is always active.

The diagram illustrates the connection of two DALI Master modules to a common DALI Master bus. Each module has a 28-pin connector and a 4-pin connector. The 4-pin connectors are connected to a common bus labeled 'DALI Master'.

Output Voltage (V)	Output Current (A)	Output Power (W)
0	0.00	0.00
1	0.05	0.50
2	0.10	2.00
3	0.15	4.50
4	0.20	8.00
5	0.25	12.50
6	0.30	18.00
7	0.35	24.50
8	0.40	32.00
9	0.45	40.50
10	0.50	50.00

0-10V DIMMING

 Warning: Please make sure the correct current is set before starting the driver!

Model	KL30C-PDiiV, 1x30W
Rated voltage	220-240Vac, 50/60Hz
Rated current	0.16A (max)
Operating temperature	-25°C~50°C
Dimming	DALI & PUSH & 0-10V
Output voltage	300mA 9-58V DC 2.7-17W; 350mA 9-58V DC 3-20W; 400mA 9-58V DC 3.6-23W; 450mA 9-58V DC 4-26W; 500mA 9-58V DC 4.5-29W; 550mA 9-55V DC 5-30W; 600mA 9-50V DC 5.4-30W; 650mA 9-46V DC 5.8-30W; 700mA 9-42V DC 6.3-30W; 750mA 9-40V DC 6.7-30W; 800mA 9-38V DC 7.2-30W; 850mA 9-35V DC 7.6-30W; 900mA 9-34V DC 8.1-30W.
The wrie length of DALI	300m Max.
Abnormal protection	Output short-circuit protection after restart
Overheating protection	Overheating protection after restart
EMC standard	EN55015, EN61000-3-2, EN61547, EN61000-3-3
DALI standard	IEC62386-102, IEC62386-207
Safety standard	EN61347-1 EN61347-2-13
Certification	CE, ENEC14
Dims	103°67°22mm
Protection class	IP20

		Output Current/Voltage Setting			
		1	2	3	4
ON	300mA	—	—	—	—
	350mA	ON	—	—	—
	400mA	—	ON	—	—
	450mA	ON	ON	—	—
	500mA	—	—	ON	—
	550mA	ON	—	ON	—
	600mA	—	ON	ON	—
	650mA	ON	ON	ON	—
	700mA	ON	ON	—	ON
	750mA	—	—	ON	ON
	800mA	ON	—	ON	ON
	850mA	—	ON	ON	ON
900mA	ON	ON	ON	ON	

QUESTION	CAUSE	REMEDY
Lights will not illuminate	Incorrect wiring	Check wiring
	Driver had been turn off by push signal.	Long press push switch to recover the driver.
		Reset the driver by short 0-10V interface.
Lights out of synchronous	Press push switch rapidly.	Long press push button at least 15s for re-synchronization. Avoid to rapidly press push button.

Shenzhen Merrytek Technology Co.,Ltd


Phone:+86(755)2305 7253/59 • Fax:+86(755)2786 3012 • Email:sales@merrytek.com • www.merrytek.com
Add:2nd and 3rd Floor,No.3 building,380 Xiangshan Avenue,Luotian,Yanluo,Baoan,Shenzhen,518127,China

文件编号: KF-BZD-2009-036

物料编码: 1050050275 版本: A0版

材质要求: 70G书写纸 210*297MM 黑白单面印

折页方式,此面朝外

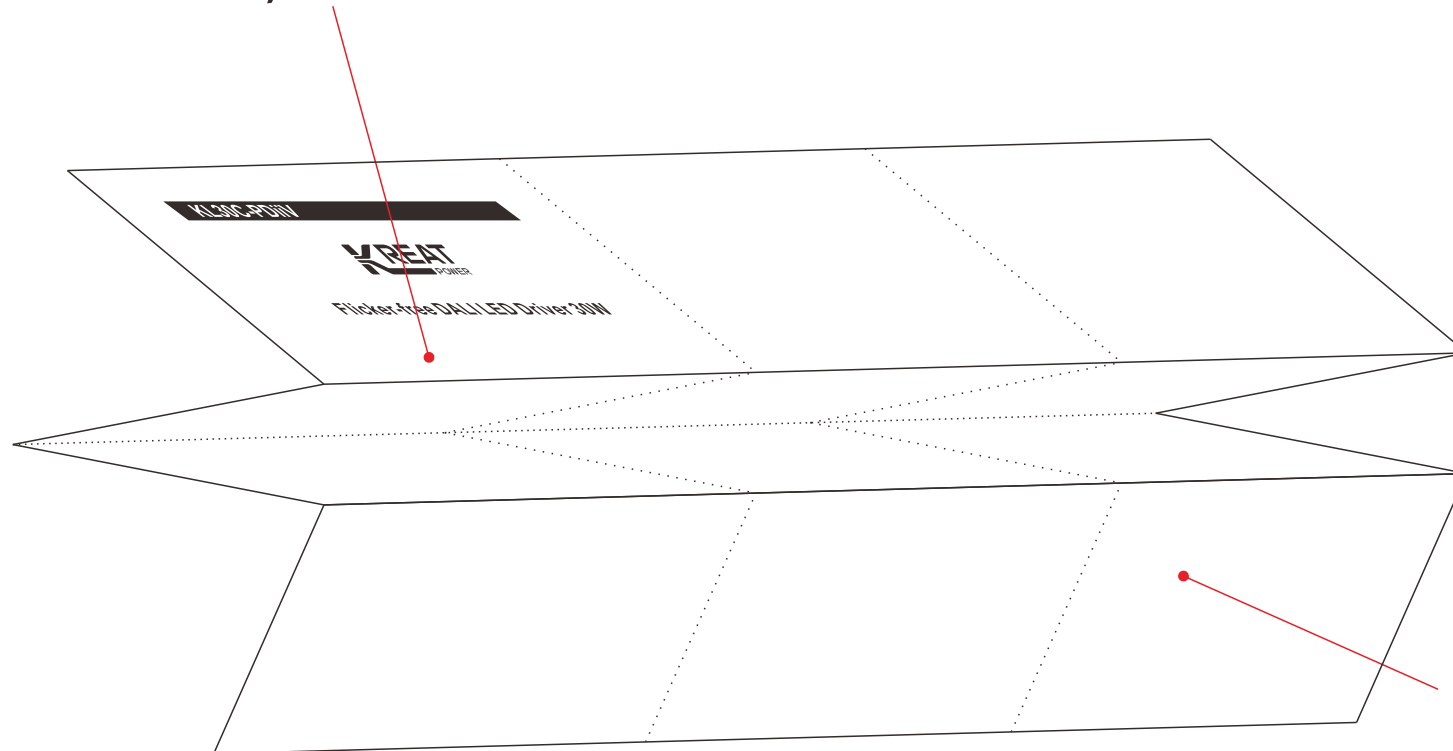

折页方式,此面朝外