


KL40C-PDiiV1



Flicker-free DALI LED Driver 40W

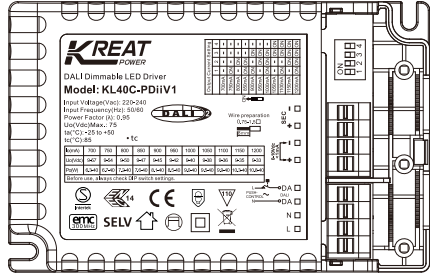

EN



Instruction
MI210311A0

FEATURE

- Built-in DALI 2 protocol, no flicker in full dimming range;
- Secondary 0-10V (the darkest below 1V does not turn off) ;
- Primary Push dimming function; Push dimming has state memory function;
- Short circuit / over temperature / over voltage protection; reduce output current after over temperature;
- Standby power consumption $\leq 0.5W$;
- Life span > 50,000 hours.

CONNECTION

1. Start with setting the output current. The current can be easily configured by choosing the correct combination of the DIP switches(see fig F)
2. Connect the luminaires to the driver according to the wiring diagram.(see Fig A,B,or C)

PUSH DIMMING (see wiring diagram, Fig A)

- On/off: short push (100ms~1sec) on the switch
- Stepless dimming: long push (1sec~8secs) on the switch

0-10V DIMMING (see wiring diagram, Fig C)

- The driver supports any active 0-10V dimmer, Dimming curve, see Fig D.
- As DALI and push dimming is always active, If use the DALI dimming and push dimming first, users have to short 0-10V interface and power on driver 15 seconds at least to make 0-10V active before using 0-10V dimming.

DALI DIMMING (see wiring diagram, FigB)

- The driver built-in DALI interface, DALI Dimming is always active.






FACTORY SETTING

0-10V dimming, 700mA

Warning: Please make sure the correct current is set before starting the driver!

SPECIFICATIONS

Model	KL40C-PDiiV1, 1x40W
Rated voltage	220-240V AC, 50/60Hz
Rated current	0.22A (max)
Operating temperature	-25°C~50°C
Dimming	DALI & PUSH & 1-10V(0-10V)
Output voltage	700mA 9~57VDC 6.3~40W; 750mA 9~54V DC 6.7~40W; 800mA 9~50V DC 7.2~40W; 850mA 9~47V DC 7.6~40W; 900mA 9~45V DC 8.1~40W; 950mA 9~42V DC 8.5~40W; 1000mA 9~40V DC 9.0~40W; 1050mA 9~38V DC 9.5~40W; 1100mA 9~36V DC 9.9~40W; 1150mA 9~35V DC 10.3~40W; 1200mA 9~33V DC 10.8~40W
The wire length of DALI	300m Max
Abnormal protection	Output short-circuit protection after restart
Overheating protection	Overheating protection after restart
EMC standard	EN55015, EN61000-3-2, EN61547, EN61000-3-3
DALI standard	IEC62386-102, IEC62386-207
Safety standard	EN61347-1 EN61347-2-13
Certification	CE, ENEC14
Dims	123° 79° 23.8mm
Protection class	IP20

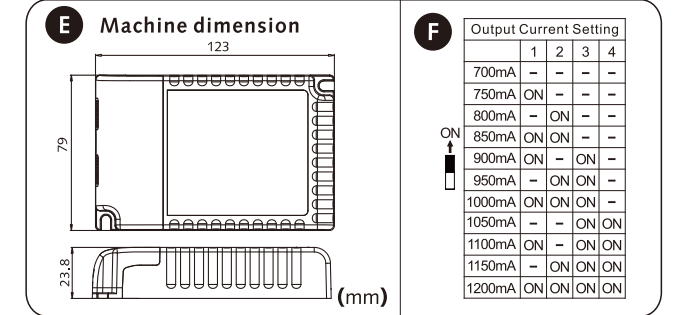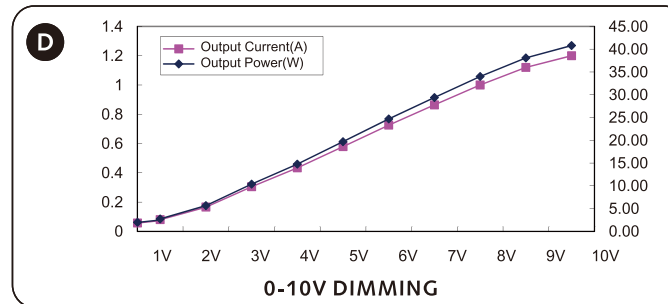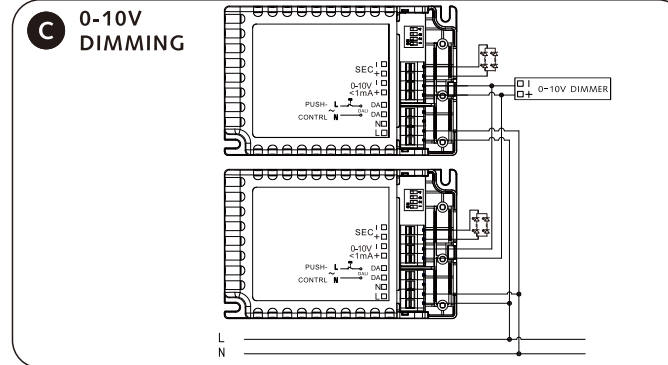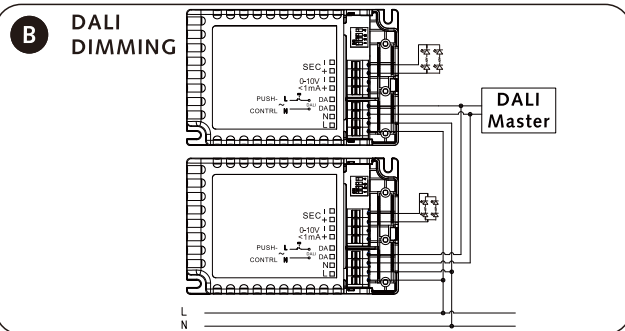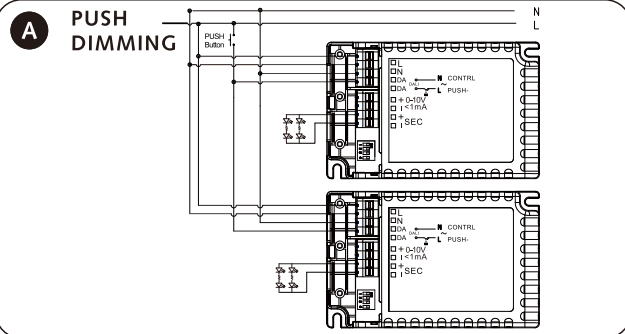

FAQ

Question	Cause	Remedy
Lights will not illuminate	Incorrect wiring	Check wiring
	Driver had been turn off by push signal.	Long press push switch to recover the driver. Reset the driver by short 0-10V interface.
Lights out of synchronous	Press push switch rapidly.	Long press push button at least 15s for re-synchronization. Avoid to rapidly press push button.

Shenzhen Merrytek Technology Co.,Ltd

Phone: +86(755)2305 7253/59 • Fax: +86(755)2786 3012 • Email: sales@merrytek.com • www.merrytek.com
Add: 2nd and 3rd Floor, No. 3 building, 380 Xiangshan Avenue, Luotian, Yanluo, Baoan, Shenzhen, 518127, China

KL40C-PDiV1说明书

文件编号: KF-BZD-2103-010

物料编码: 1050050299 版本: A0版

材质要求: 70G书写纸 297*210MM 黑白双面印

折页方式,此面朝上

